


XV5CB Series Recommended Cutting Data - Profile Milling at 3xD ADOC (ap) - Inch

Workpiece Material Group	ISO	Hardness	● Preferred ○ Possible x Not Possible			RWOC (ae) 			End Mill Diameter (inch)			
			Emulsion	Compressed air	MMS	5%	10%	15%	3/8	1/2	5/8	3/4
						2.3	1.67	1.4	Multiply fz by this Factor based on ae. When finishing, use the standard fz per chart below. Only add chip thinning when roughing or semi-finishing.			
						Vc - SFM						
Low Carbon Steels 12L14, 1018, A36	P	≤ 28 HRC	○	●	○	1150	985	820	.0023	.0030	.0038	.0045
Medium Carbon Steels 1045, 1050, 1070		≤ 38 HRC	○	●	○	850	785	720	.0023	.0030	.0038	.0045
Alloy Steels 4130, 4140, 4340			○	●	○	785	720	655	.0023	.0030	.0038	.0045
Die / Tool Steels A2, D2, H13, P20		≤ 45 HRC	○	●	○	720	655	590	.0023	.0030	.0038	.0045
Stainless Steels - Free Machining 303, 400 Series	M	≤ 28 HRC	●	●	○	675	590	500	.0023	.0030	.0038	.0045
Stainless Steels - Austenitic 304, 316			●	x	○	525	460	330	.0018	.0024	.0030	.0036
Stainless Steels - Difficult to Machine 13-8PH, Nitronics		≤ 45 HRC	●	x	○	360	295	230	.0015	.0020	.0025	.0030
Stainless Steels - Precipitation Hardened 15-5 PH, 17-4 PH, 17-7 PH			●	●	○	525	460	330	.0018	.0024	.0030	.0036
Titanium Alloys 6Al-4V	S	≤ 42 HRC	●	x	x	400	330	265	.0015	.0020	.0025	.0030


Notes

- Cutting data provided should be considered advisory only. Adjustments may be necessary depending on the application, workpiece rigidity, machine tool, etc.
- The XV5CB should only be used in accurate tool holders with high gripping power. ER collet type holders are not recommended.
- For optimal performance in ISO S materials, ae = ≤ 0.1 x D

XV5CB Series Recommended Cutting Data - Profile Milling at 3xD ADOC (ap) - Inch

Helical interpolation recommendations


- Under optimal conditions, with proper coolant flow/air blast techniques, up to 5° helical ramp angles are achievable with the XV5CB in most materials
- A reduction of 30-50% in both cutting speed (Vc) & feed per tooth (fz) are recommended
- Recommended hole diameter = 1.9 x D
- Minimum hole diameter = 1.2 x D

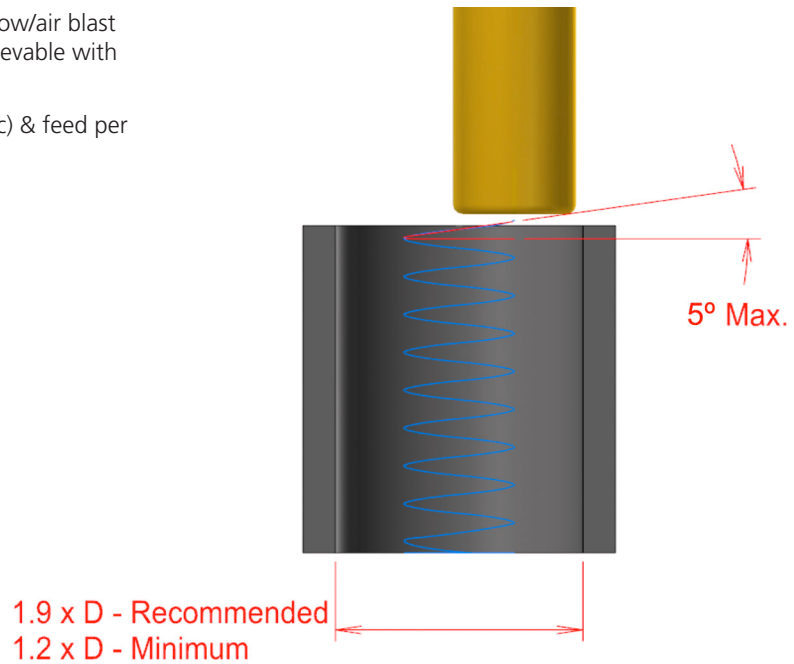

RWOC (ae)	Chip Thickness Compensation Factor
5%	2.30
7%	1.96
8%	1.84
10%	1.67
13%	1.49
15%	1.40

During profile milling with a radial width of less than 50% of the cutter diameter, the actual chip thickness at the cutting edge is less than the programmed chipload. The accompanying table shows the increase in chipload by given radial width percentage to adjust for chip thinning. Multiply your recommended chip thickness by the appropriate feed factor to establish the correct feed rate.

XV5CB Series Recommended Cutting Data - Profile Milling at 4xD ADOC (ap) - Inch

Workpiece Material Group	ISO	Hardness	● Preferred ○ Possible x Not Possible			RWOC (ae)		End Mill Diameter (inch)			
			Emulsion	Compressed air	MMS			3/8	1/2	5/8	3/4
						5%	10%	← Multiply fz by this Factor based on ae. When finishing, use the standard fz per chart below. Only add chip thinning when roughing or semi-finishing.			
						2.3	1.67				
						Vc - SFM	fz - in/tooth				
Low Carbon Steels 12L14, 1018, A36 Medium Carbon Steels 1045, 1050, 1070 Alloy Steels 4130, 4140, 4340 Die / Tool Steels A2, D2, H13, P20	P	≤ 28 HRC	○	●	○	985	820	.0015	.0020	.0025	.0030
		≤ 38 HRC	○	●	○	785	720	.0015	.0020	.0025	.0030
			○	●	○	720	655	.0015	.0020	.0025	.0030
		≤ 45 HRC	○	●	○	655	590	.0015	.0020	.0025	.0030
Stainless Steels - Free Machining 303, 400 Series Stainless Steels - Austenitic 304, 316 Stainless Steels - Difficult to Machine 13-8PH, Nitronics Stainless Steels - Precipitation Hardened 15-5 PH, 17-4 PH, 17-7 PH	M	≤ 28 HRC	●	●	○	590	500	.0015	.0020	.0025	.0030
			●	x	○	525	460	.0011	.0014	.0018	.0021
		≤ 45 HRC	●	x	○	295	230	.0009	.0012	.0015	.0018
			●	●	○	525	460	.0011	.0014	.0018	.0021
Titanium Alloys 6Al-4V	S	≤ 42 HRC	●	x	x	330	265	.0009	.0012	.0015	.0018


Notes

- Cutting data provided should be considered advisory only. Adjustments may be necessary depending on the application, workpiece rigidity, machine tool, etc.
- The XV5CB should only be used in accurate tool holders with high gripping power. ER collet type holders are not recommended.
- For optimal performance in ISO S materials, $ae = \leq 0.07 \times D$

XV5CB Series Recommended Cutting Data - Profile Milling at 4xD ADOC (ap) - Inch

Helical interpolation recommendations

- Under optimal conditions, with proper coolant flow/air blast techniques, up to 5° helical ramp angles are achievable with the XV5CB in most materials
- A reduction of 30-50% in both cutting speed (Vc) & feed per tooth (fz) are recommended
- Recommended hole diameter = 1.9 x D
- Minimum hole diameter = 1.2 x D

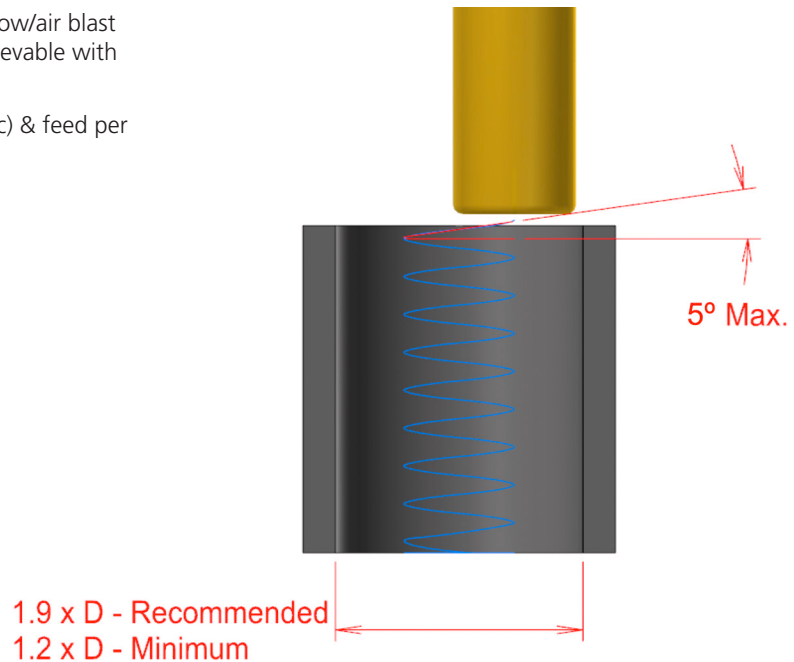

RWOC (ae)	Chip Thickness Compensation Factor
5%	2.30
7%	1.96
8%	1.84
10%	1.67

During profile milling with a radial width of less than 50% of the cutter diameter, the actual chip thickness at the cutting edge is less than the programmed chipload. The accompanying table shows the increase in chipload by given radial width percentage to adjust for chip thinning. Multiply your recommended chip thickness by the appropriate feed factor to establish the correct feed rate.