


Twister® GP Series 206

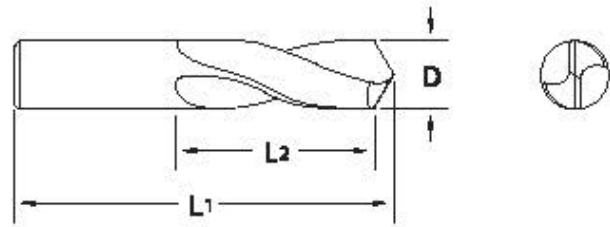

- Designed to allow high feed rates with good chip flow.
- Four facet drill point minimizes drill wander and assures accurately sized holes.
- Shorter length reduces deflection and vibration, increases drill accuracy and improves tool life.

Tool No.	EDP	Diameter			OAL	Flute Length
		D				
		Inch	Wire	Decimal		
20604000	26004		60	.0400	1-1/2	3/8
20604100	26007		59	.0410	1-1/2	3/8
20604200	26013		58	.0420	1-1/2	3/8
20604300	26016		57	.0430	1-1/2	3/8
20604650	26025		56	.0465	1-1/2	3/8
20604690	26028	3/64		.0469	1-1/2	3/8
20605200	26040		55	.0520	1-1/2	3/8
20605500	26046		54	.0550	1-1/2	3/8
20605950	26058		53	.0595	1-1/2	3/8
20606250	26061	1/16		.0625	1-1/2	3/8
20606350	26067		52	.0635	1-1/2	3/8
20606700	26073		51	.0670	1-1/2	3/8
20607000	26076		50	.0700	1-1/2	3/8
20607300	26082		49	.0730	1-1/2	3/8
20607600	26088		48	.0760	1-1/2	1/2
20607810	26091	5/64		.0781	1-1/2	1/2
20607850	26094		47	.0785	1-1/2	1/2
20608100	26100		46	.0810	1-1/2	1/2
20608200	26103		45	.0820	1-1/2	1/2
20608600	26109		44	.0860	2	1/2
20608900	26115		43	.0890	2	1/2
20609350	26121		42	.0935	2	1/2
20609380	26124	3/32		.0938	2	1/2
20609600	26130		41	.0960	2	1/2
20609800	26133		40	.0980	2	5/8
20609950	26139		39	.0995	2	5/8
20610150	26142		38	.1015	2	5/8
20610400	26148		37	.1040	2	5/8
20610650	26154		36	.1065	2	5/8
20610940	26157	7/64		.1094	2	5/8
20611000	26160		35	.1100	2	5/8
20611100	26166		34	.1110	2	5/8
20611300	26169		33	.1130	2	5/8
20611600	26175		32	.1160	2	5/8

Tool No.	EDP	Diameter			OAL	Flute Length
		D				
		Inch	Wire	Decimal		
20612000	26181		31	.1200	2	5/8
20612500	26187	1/8		.1250	2	5/8
20612850	26193		30	.1285	2	5/8
20613600	26202		29	.1360	2	5/8
20614050	26208		28	.1405	2	5/8
20614060	26211	9/64		.1406	2	5/8
20614400	26217		27	.1440	2	5/8
20614700	26223		26	.1470	2	5/8
20614950	26226		25	.1495	2	5/8
20615200	26232		24	.1520	2	5/8
20615400	26238		23	.1540	2	5/8
20615620	26241	5/32		.1562	2	3/4
20615700	26244		22	.1570	2	3/4
20615900	26250		21	.1590	2	3/4
20616100	26253		20	.1610	2	3/4
20616600	26262		19	.1660	2-1/8	3/4
20616950	26268		18	.1695	2-1/8	3/4
20617190	26271	11/64		.1719	2-1/8	3/4
20617300	26274		17	.1730	2-1/8	3/4
20617700	26280		16	.1770	2-1/8	3/4
20618000	26286		15	.1800	2-3/16	3/4
20618200	26292		14	.1820	2-3/16	3/4
20618500	26295		13	.1850	2-3/16	3/4
20618750	26298	3/16		.1875	2-3/16	3/4
20618900	26304		12	.1890	2-3/16	3/4
20619100	26307		11	.1910	2-3/16	3/4
20619350	26313		10	.1935	2-3/16	3/4
20619600	26316		9	.1960	2-1/4	3/4

Inch	
D	Tolerance
.0400 - .7812	+0.0000/-0.0005

See Series 226 on page 119 for mm size Stub Drills



Page 166